RU-2-22

Rotary union for 2 media

■ For closed or open center cylinders (not for ZHVD-DFR)
■ Media: Air + oil / air + coolant



Application/customer benefits

- Rotary union for media supply for rotating cylinders Universal for air + oil / air + coolant
- Can also rotate dry (non-pressurised)

Technical features

- Rotary union for 2 media
- Port A for air, oil and coolant, Port B for air


The medium must be free of contamination Filter 25 µm requested

Standard equipment

Rotary union RU-2-22 Anti rotation pin-blok Adapter for tube Ø 12 mm (ID = 10 mm)

Option:

Adapter for tube \emptyset 10 mm (ID = 8 mm) Id. No. 043703 Adapter for tube \emptyset 8 mm (ID = 6 mm) Id. No. 043681

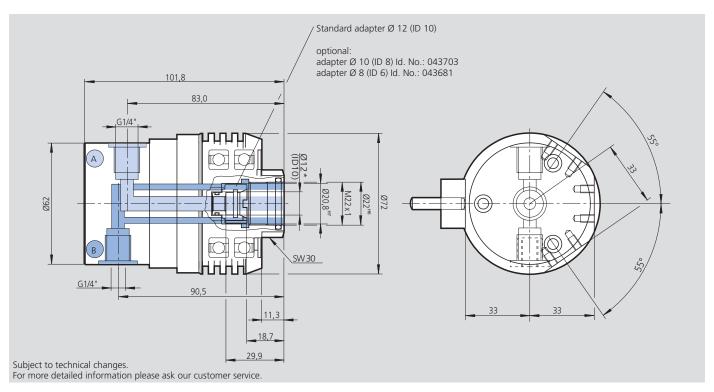

Technical data

SMW-AUTOBLOK Type	ld. No.	Max. speed	Operating pressure connection A Media: air, oil, cooling lubricant		Operating pressure connection B Media: air only		Mass	Filter required
		r.p.m	bar	psi	bar	psi	kg	μm
RU-2-22	044970	4000	40	580	10	145	0.94	25
		4500	35	507.5	10	145		
		5000	30	435	10	145		
		5500	25	362.5	10	145		
		6500	20	290	10	145		